


230W Maximum Power

Poly or Mono-Crystalline Solar Module

Benefits:

- High and stable conversion efficiency based on over 4 years professional experience
- High reliability with guaranteed +/-3% output power tolerance
- Proven materials,tempered front glass,and a sturdy anodized aluminum frame allow modules to operate reliably in multiple mountily configurations
- Combination of high efficiency and attractive appearance

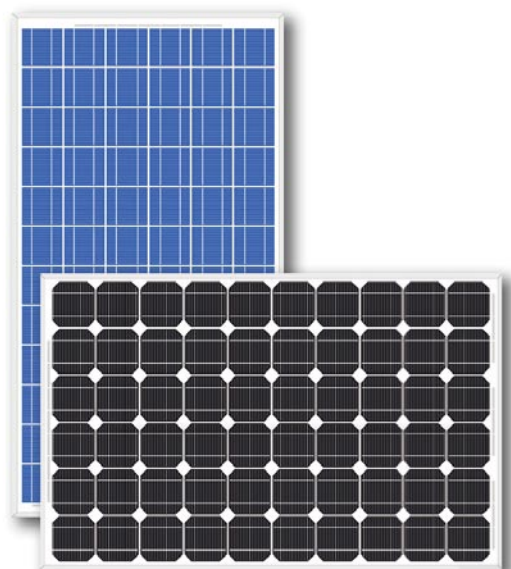

Quality and Safety

- 25-year output power warranty
- ISO9001:2000 (Quality Management System) certified factory
- IEC61215,Safety tested IEC61730 (in process), CE.
- Product Quality Warranty & Product Liability Insurance guarantee end users' benefits



SunLink PV Co.,Ltd

Zhangjiagang Economic Development Zone,
Zhangjiagang City,Jiangsu Province,
215600, China.

Tel:+86-512-58992216

Tel:+86-512-58262253

Fax:+86-512-58262258

www.sunlink-pv.com



Temperature Coefficients

NOCT	45 +/-2°C
Voltage temperature coefficient(Voc)	-0.36%/°C
Current temperature coefficient(Isc)	+0.033%/°C
Power temperature coefficient(Pmpp)	-0.44%/°C
Minimum power tolerance	+/-3%

NOCT:Nominal Operating cell Temperature

Mechanical Data

Solar Cell	60 Poly or Mono-crystalline 156 x 156mm
Front Glass	3.2mm tempered
Junction Box	IP 65 rated
Output Cables	900mm length cable/compliable with MC IV connectors
Frame	Anodized aluminium
Weight	20kg
Dimension	1652x1000x50mm



Warranty and Certifications

Warranty	3 years workmanship, 10 years 90%, 25 years 80% power warranty
Certifications	IEC61215, Safety tested IEC61730, CE

Electrical Data

Module Type	SL 220-20	SL 220-20	SL 220-20
Nominal peak power(Wp)	230W	220W	210W
Nominal voltage(Vmp)	29.9V	29.5V	29.1V
Nominal current(Imp)	7.69A	7.46A	7.22A
Open circuit voltage(Voc)	37.2V	36.8V	36.4V
Short circuit current(Isc)	8.24A	8.06A	7.80A
Module efficiency	14.0%	13.4%	12.7%
Operating Temperatere	-40 to +85°C	-40 to +85°C	-40 to +85°C
Maximum System Voltage	1000V DC	1000V DC	1000V DC

STC:1000W/m²,25°C

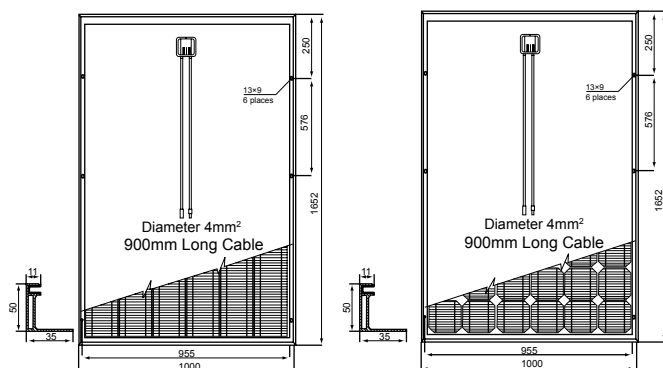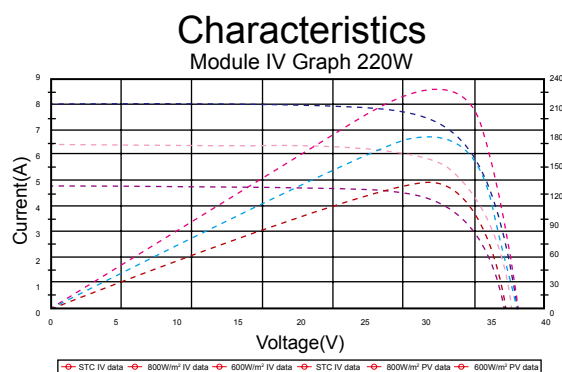

CAUTION:Read Safety And Installation.Instructions Before Using The Product. Go to www.sunlink-pv.com

© October 2008 SunLink PV Co.,Ltd. All rights reserved. Sepcifications included in this datasheet are subject to change without notice.

♻️ Printed on recycled paper.